Screens » Floor Screens



Collections: Alinta

Applications: Screens & Partitions



Screens » Floor Screens










Screens » Floor Screens





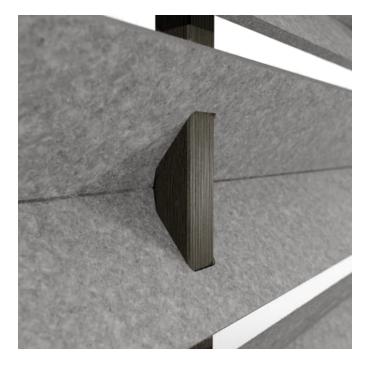

Screens » Floor Screens

Alinta Floor Screen is lightweight and easy to move. The horizontal spacing between the panels is designed to balance privacy, acoustics, and light.

| ✓ Absorbs Noise | Easy Install | ✓ Easy Clean | |
|--------------------|--|---|--|
| ✓ Bleach Cleanable | ✓ Acoustic | | |
| Description | The Alinta Floor Screen turns almost any open space into a workspace. It's V-fold gives a strong, angular aesthetic, while its lightweight construction makes it easy to move and create spaces wherever you need them. The design's horizontal spacing between the PET panels balances privacy, acoustics, and light. | | |
| | 0 , | een, comes in 61" and 72" heights and 48", 72" in PET colors, prints and the choice of wood | |
| | func., Alinta Floor Screens are | easily cleaned with bleach and water. | |
| Composition | Density 0.5 lb/ft² 2.4 kg /m² | | |
| PET Colours | Refer to Color + Finish | | |
| Material | • 60% post-consumer recycled PET bottles. | | |
| | 35% pre-consumer recycled content from PET chips | | |
| | • 5% bio-based Polylactic Ac | id (PLA) | |
| Wood | Refer to Color + Finish | | |
| Dimensions | • 48" (1220mm) w x 61" (1550mm) h x 15" (377mm) d | | |
| | • 48" (1220mm) w x 72" (1829mm) h x 15" (377mm) d | | |
| | • 72" (1829mm) w x 61" (1550mm) h x 15" (377mm) d | | |
| | • 72" (1829mm) w x 72" (1829mm) h x 15" (377mm) d | | |
| | • 96" (2439mm) w x 61" (1550mm) h x 15" (377mm) d | | |
| | • 96" (2439mm) w x 72" (1829mm) h x 15" (377mm) d | | |
| | • 96" (2439mm) w x 72" (1829r | mm) h x 15" (377mm) d | |



Screens » Floor Screens

| Fire Rating | ASTM-E84 – Class A classification AS ISO 9705 – 2003 – Group 1 classification EN-13501 – B-s2-d0 classification | |
|------------------------|--|--|
| Made In | USA | |
| Lead Time | 4 weeks | |
| Inclusions | Wood Supports, PET Panels | |
| Assembly & Delivery | Flat pack delivery, minimal assembly required. See installation instructions for detail. | |
| Care Instructions | Dab func. with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth. | |
| | For difficult stains, use a solution of household bleach (10% bleach / 90% water). | |
| | To remove the bleach, repeat using a clean, water dampened cloth, then pat dry. | |
| | Always test in an inconspicuous area first and if you don't see the expected results, contact us. | |
| Warranty | 5-year warranty. | |
| Additional Comments | To see how vivid the colors truly are, it's easy to request a sample through the "Request information" button on this page, or you can ask for one from your local sales guru. | |
| | | |



How to Specify

Select 1 x PET Color

Select 1 x Wood Finish

• Refer Product Specification Guide

Screens » Floor Screens

Colour & Finish Options

func solid colors





Screens » Floor Screens



func timber print




func premium material



Screens » Floor Screens



func premium wood

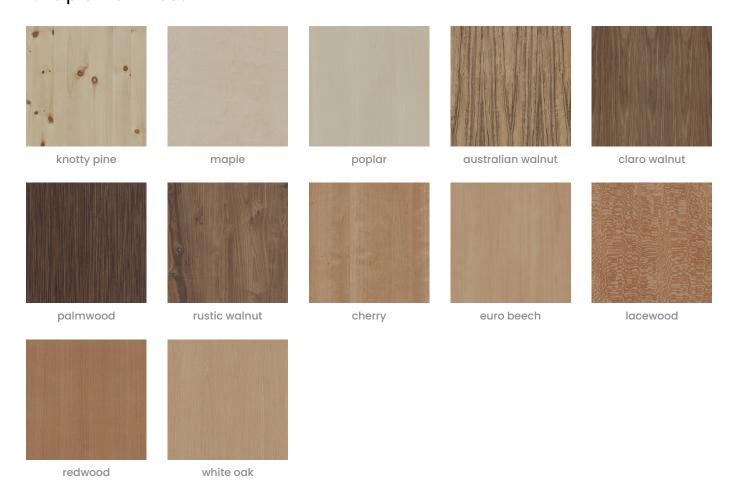

Screens » Floor Screens

func textile braid



func textile burlap





Screens » Floor Screens




func textile herring





Screens » Floor Screens

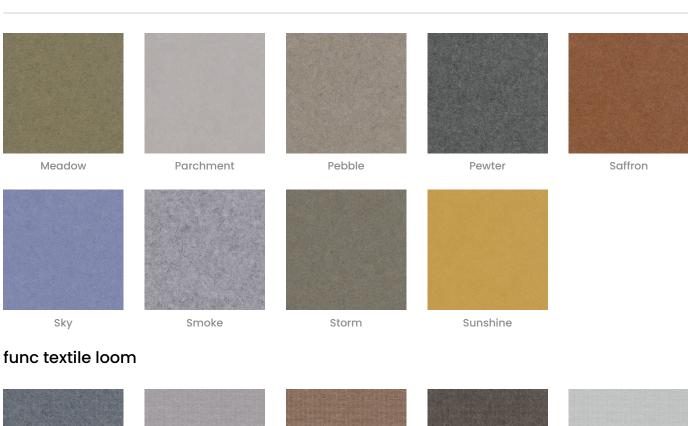





Saffron

Meadow

Parchment

Pebble

Pewter

Screens » Floor Screens











func wood









Blonde

